


## Attaching the throttle cable

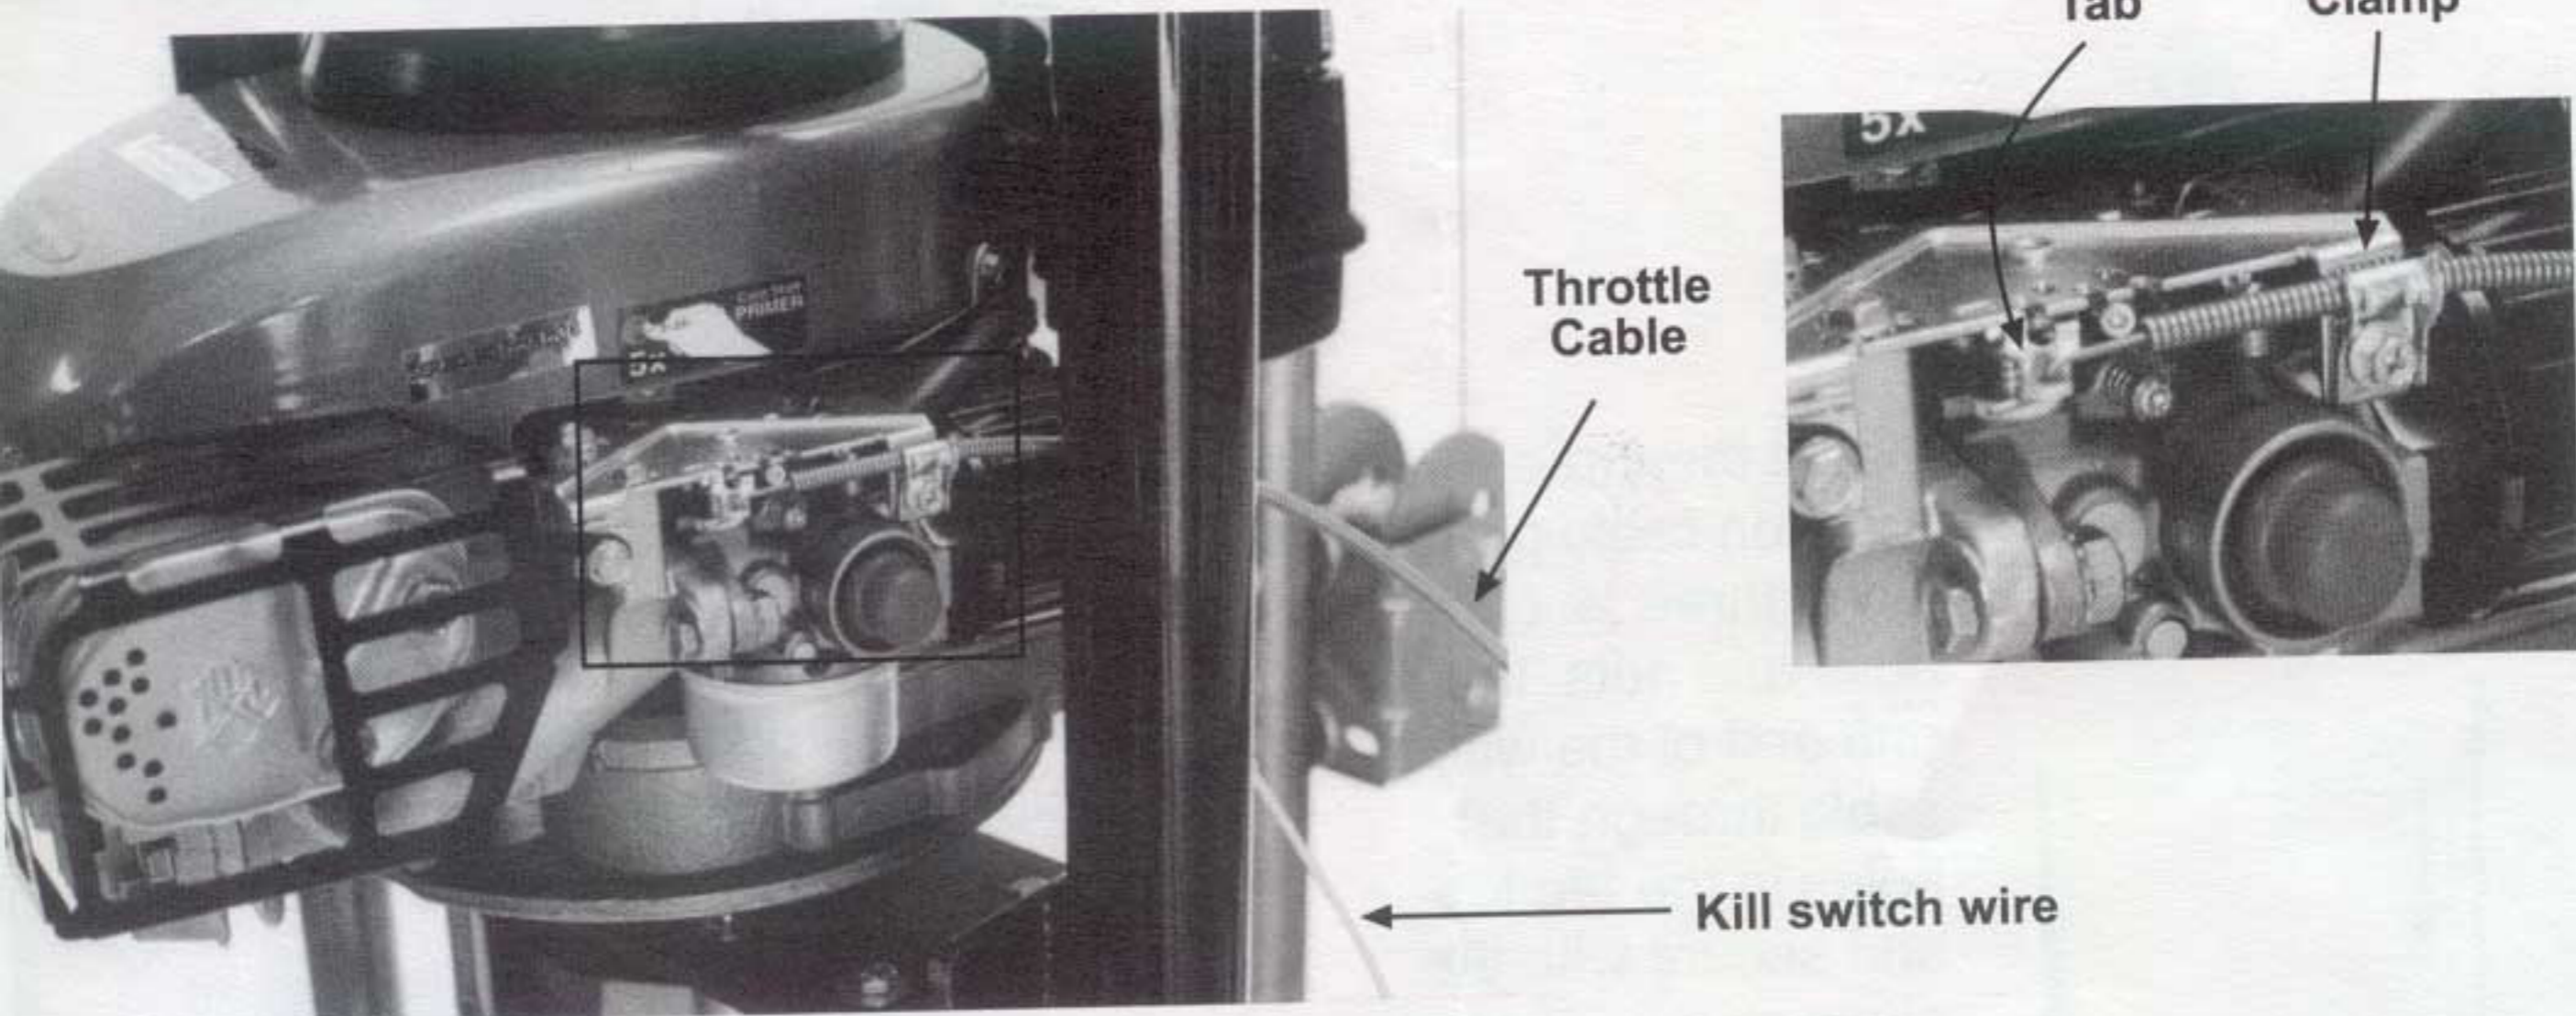

Insert the end of the throttle cable through the throttle tab on the engine, then lay the cable into the clamp and secure with the clamp screw. Operate the throttle control above the winch to be sure the throttle tab swings freely back and forth.

Connect the kill switch wire on the throttle cable to the wire from the engine by pressing the connectors together. The first time you start the engine, be sure to check the kill switch by shutting off the engine with it.

## Stabilizer bar and drill stem guide

**WARNING: DO NOT OPERATE THIS DRILL WITHOUT THE STABILIZER BAR.**



Bolt the stabilizer bar to the underside of the base using two  $\frac{1}{4}$ " x 1" bolts, washers and nuts.



Place the drill stem guide onto the poles and base.

TIP: When starting the first drill stem and bit, attach the bit to the drill stem, then slide the guide over the drill stem and place all the pieces into the power mast.

Some of the items we sell are covered by service warranties by their original manufacturers who have authorized service centers around the country. Please refer to the owners manuals for these products for maintenance and care instructions. Should you need service on these items, call us. We'll be glad to help you.

 DeepRock