


RUPE MUD PUMP

A LIGHT WEIGHT POSITIVE DISPLACEMENT PUMP

- WEIGHT 800 LBS. BARE PUMP
- 230 GAL/MIN 400 PSI (NORMAL OPERATION)
- 260 GAL/MIN 400 PSI (MAX. RECOMMENDED)
- HYDRAULICALLY POWERED, 20 TO 45 GAL/MIN AT 1000 TO 2500 PSI
- WORKS WITH ALL HYDRAULIC PUMPS INCLUDING HYDROSTATIC
- HYDRAULIC SHIFT, NO ELECTRONICS
- CHROME LINED MATERIAL CHAMBERS
- HARDENED STEEL VALVES
- CASE HARDENED STEEL SEATS
- 4" SUCTION, 3" DISCHARGE (STANDARD)
- 6' LONG X 1.5' WIDE X 2.5' TALL

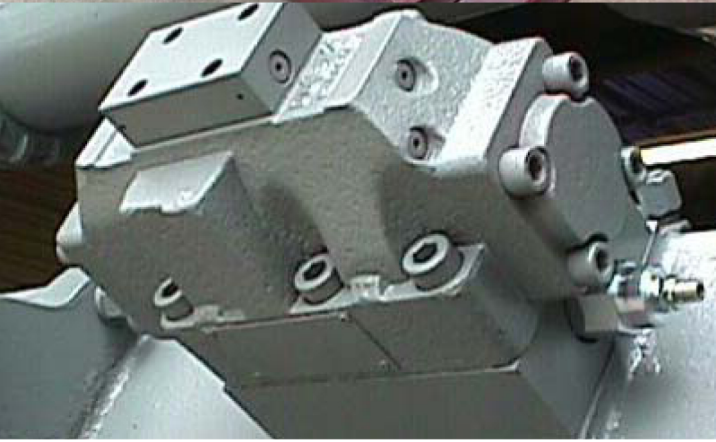

**SOLD AND
MANUFACTURED
EXCLUSIVELY BY**

DeepRock
Manufacturing Company

Specifications

Pressures

2500 PSI OIL	400 PSI FLUID DISCHARGE	*MAX OIL PRESSURE
2000 PSI OIL	325 PSI FLUID DISCHARGE	
1500 PSI OIL	250 PSI FLUID DISCHARGE	
1000 PSI OIL	160 PSI FLUID DISCHARGE	

Volume

45 GAL OIL	260 GAL MUD	
40 GAL OIL	230 GAL MUD	*RECOMMENDED MAX (45 CYCLES/MIN)
35 GAL OIL	200 GAL MUD	
30 GAL OIL	175 GAL MUD	
25 GAL OIL	145 GAL MUD	
20 GAL OIL	115 GAL MUD	

Comparisons

	*BARE WEIGHT	MAX PSI	NORMAL GPM	MAX GPM
4.5 X 5 MUD PUMP	1475	200	120	150
5 X 6 MUD PUMP	2330	310	150	200
5.5 X 8 MUD PUMP	4775	338	200	317

*ADD 200 - 600 LBS FOR DRIVING MECHANISM

2129 South V W Goodwin Blvd
Marquez, Texas 77865
(855) 457-4469 (Toll-Free Number)
www.deeprock.com

DeepRock
Manufacturing Company